


ATTACHEMENT 1: Locations and Quantities


Location 1: 57 Ave (OLSAGM0595 & OLSAGM0596)

- Sewer cleaning and CCTV of approximately 216 meters of sanitary sewer
- Approximately 216 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 22 sanitary services
- CCTV of approximately 216 meters of post lined sanitary sewer

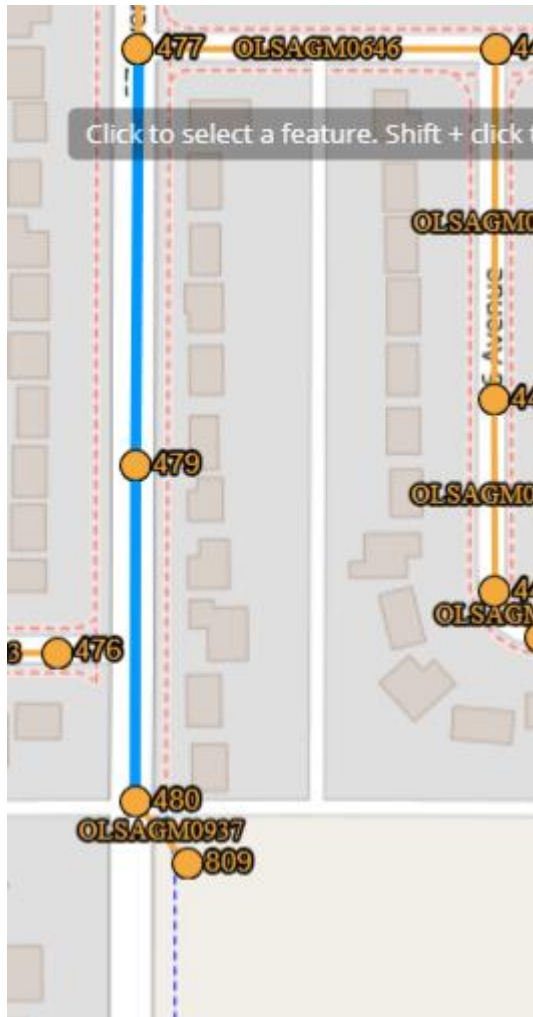


Location 2: 51 ST (OLSAGM0747)

- Sewer cleaning and CCTV of approximately 65.21 meters of sanitary sewer
- Approximately 65.21 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 7 sanitary services
- CCTV of approximately 65.21 meters of post lined sanitary sewer

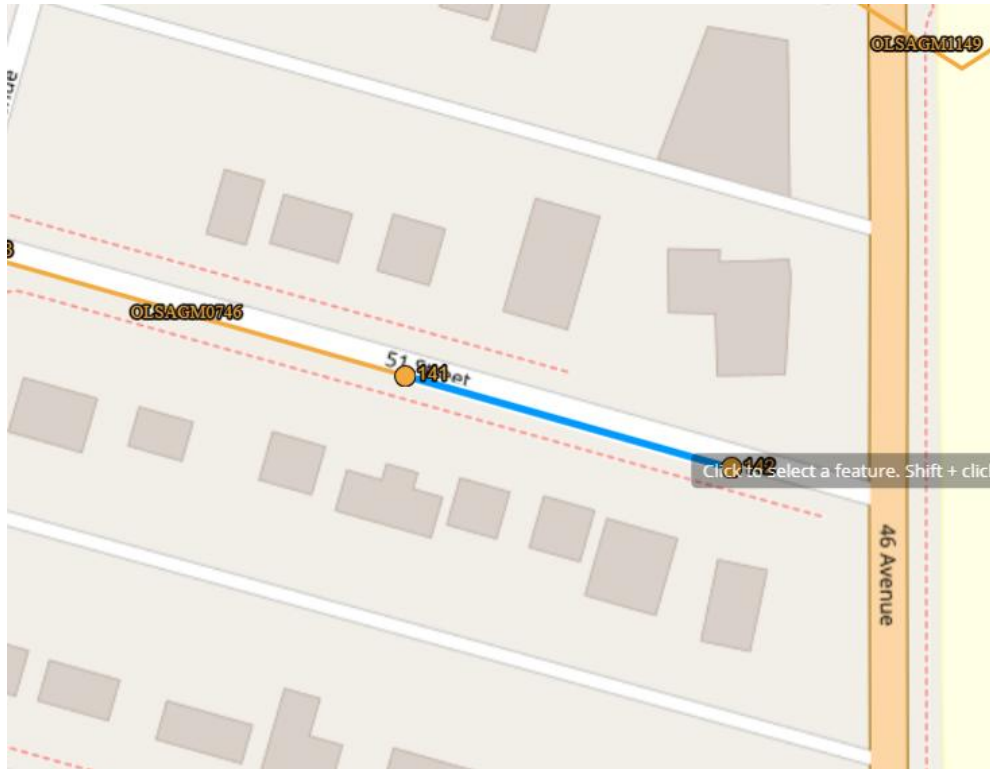

Location 3: 57 Ave (OLSAGM0290, OLSAGM0291, OLSAGM0292)

- Sewer cleaning and CCTV of approximately 241.5 meters of sanitary sewer
- Approximately 241.5 meters of CIPP relining 250mm sanitary sewer
- Re-establishing of approximately 3 sanitary services
- CCTV of approximately 241.5 meters of post lined sanitary sewer

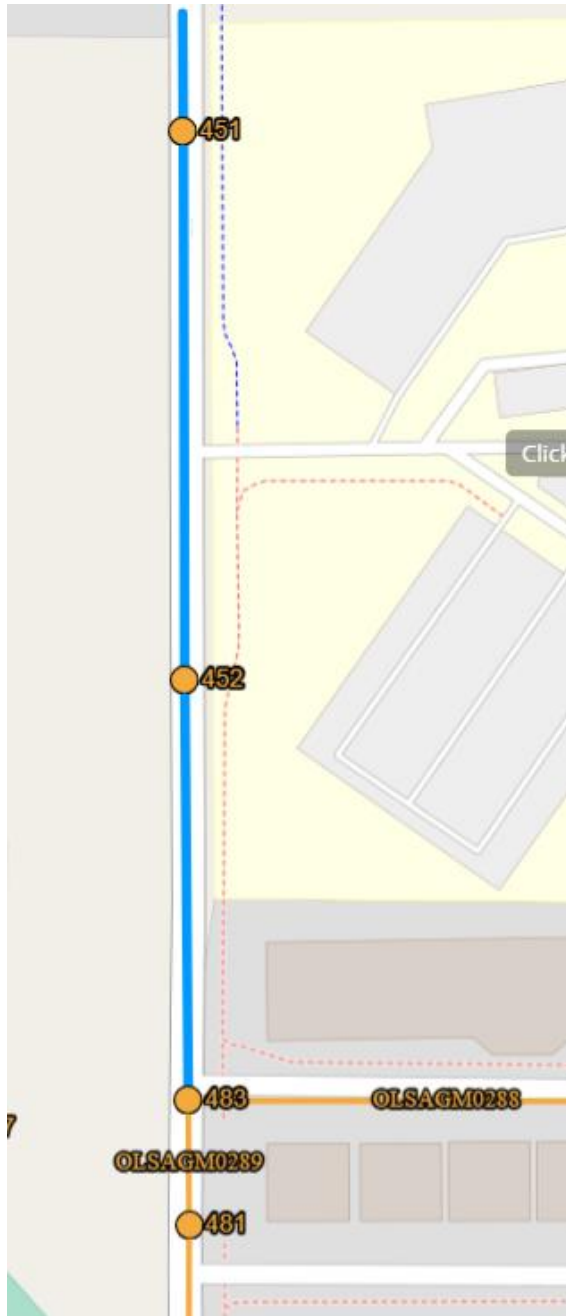


Location 4: 57 Ave (OLSAGM0303, OLSAGM0304, OLSAG0305)

- Sewer cleaning and CCTV of approximately 95.90 meters of sanitary sewer
- Approximately 95.90 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 2 sanitary services
- CCTV of approximately 95.90 meters of post lined sanitary sewer


Location 5: Sherwood Cres (OLSAGM0306, OLSAGM0307)

- Sewer cleaning and CCTV of approximately 114.21 meters of sanitary sewer
- Approximately 114.21 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 5 sanitary services
- CCTV of approximately 114.21 meters of post lined sanitary sewer

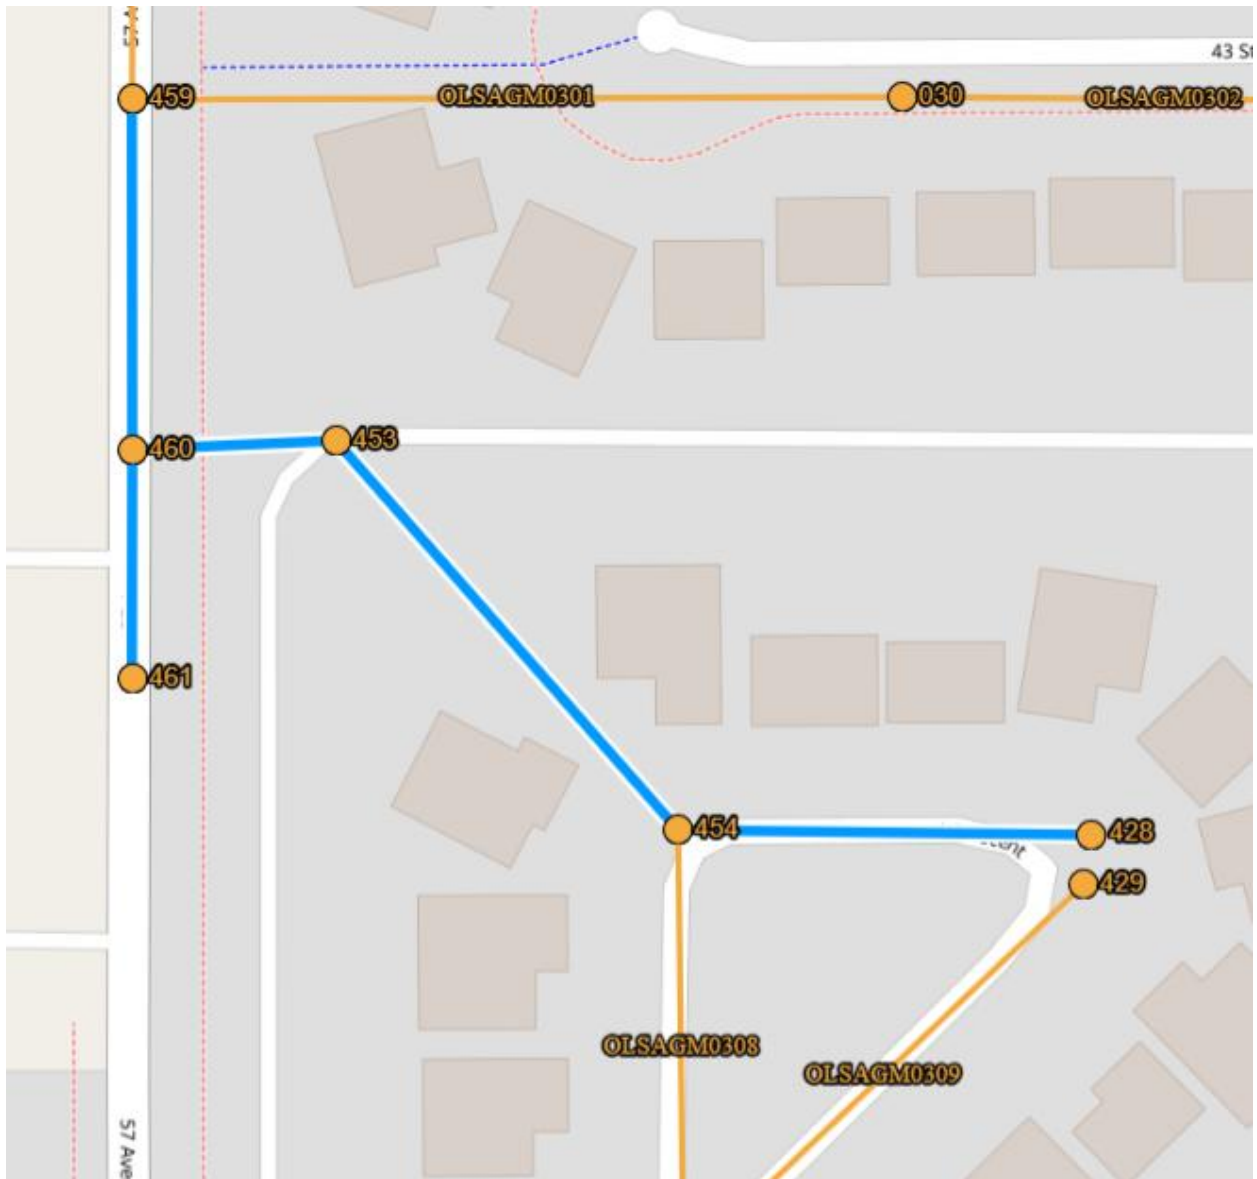


Location 6: 47 Ave (OLSAGM0745)

- Sewer cleaning and CCTV of approximately 36.97 meters of sanitary sewer
- Approximately 36.97 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 0 sanitary services
- CCTV of approximately 36.97 meters of post lined sanitary sewer

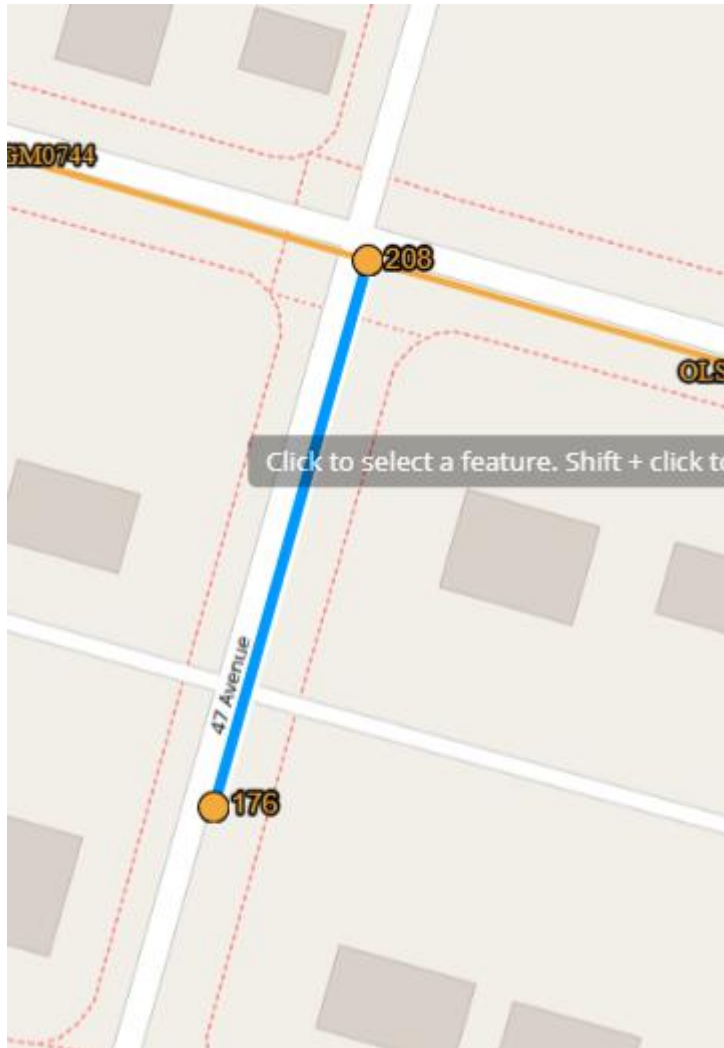


Location 7: 46 ST (Hwy 27) (OLSAGM0403)

- Sewer cleaning and CCTV of approximately 76.60 meters of sanitary sewer
- Approximately 76.60 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 1 sanitary service
- CCTV of approximately 76.60 meters of post lined sanitary sewer

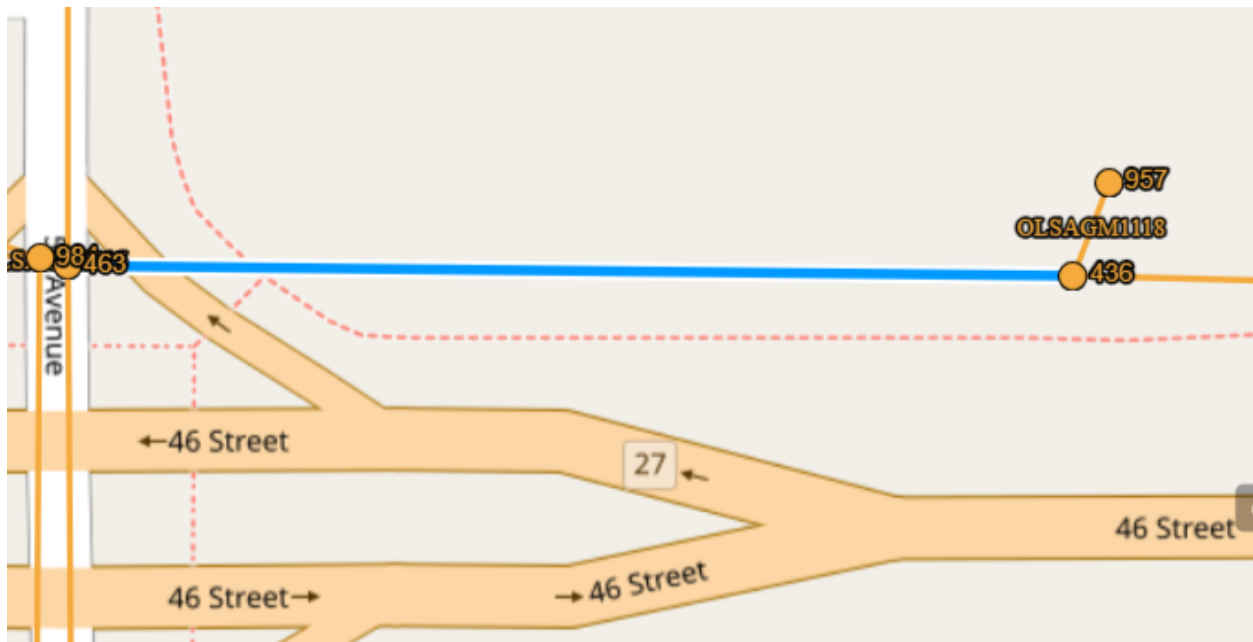


Location 8: 52 ST (OLSAGM0442)

- Sewer cleaning and CCTV of approximately 91.95 meters of sanitary sewer
- Approximately 91.95 meters of CIPP relining 200mm sanitary sewer
- Re-establishing of approximately 8 sanitary services
- CCTV of approximately 91.95 meters of post lined sanitary sewer

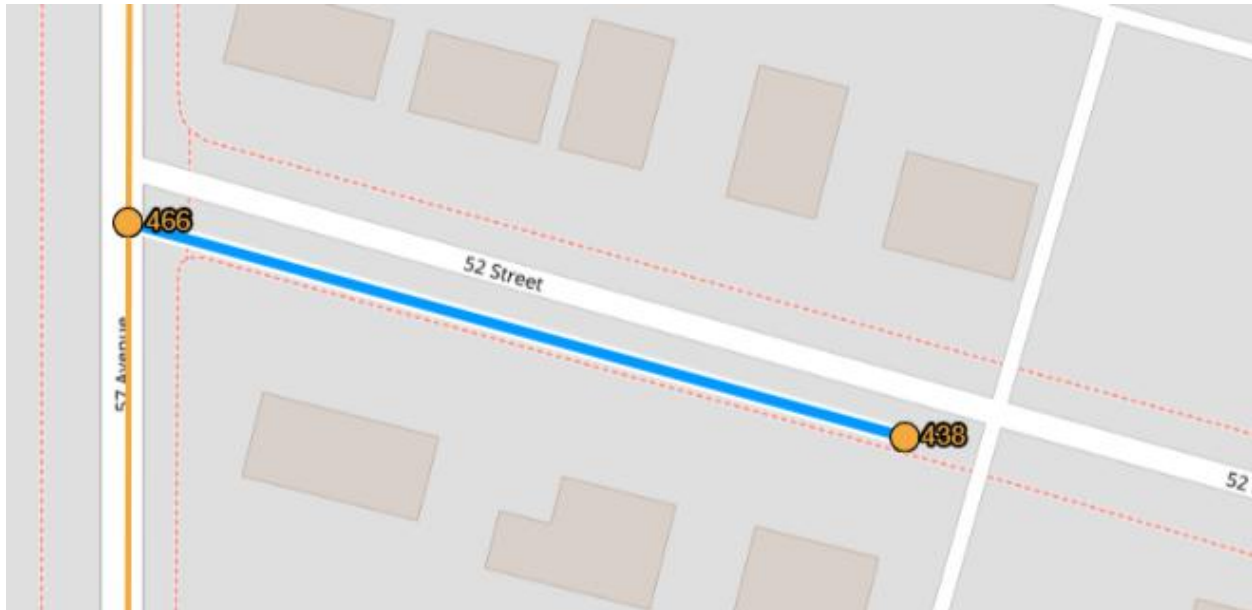

Location 9: 51 ST (OLSAGM0765)

- Sewer cleaning and CCTV of approximately 36.07 meters of sanitary sewer
- Approximately 36.07 meters of CIPP relining 300mm sanitary sewer
- Re-establishing of approximately 15 sanitary services
- CCTV of approximately 36.07 meters of post lined sanitary sewer

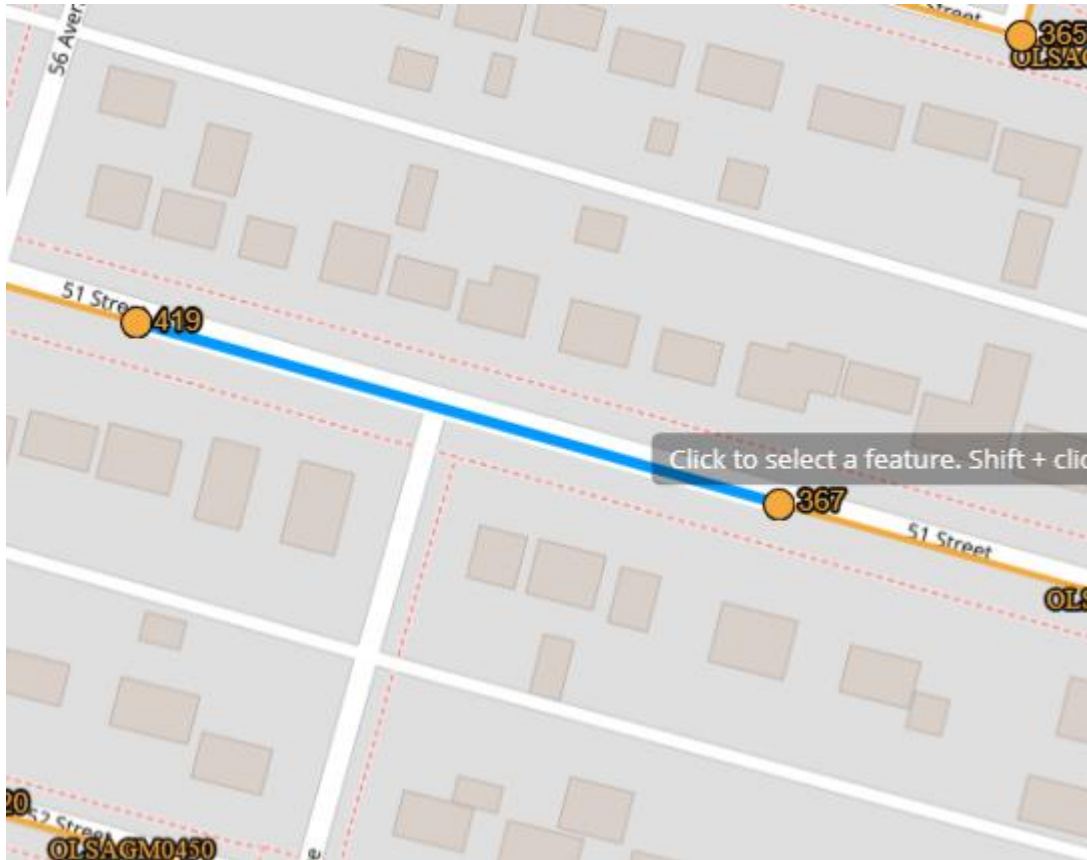

Location 10: 55 ST (OLSAGM0676)

- Sewer cleaning and CCTV of approximately 127.09 meters of sanitary sewer
- Approximately 127.09 meters of CIPP relining 300mm sanitary sewer
- Re-establishing of approximately 1 sanitary services
- CCTV of approximately 127.09 meters of post lined sanitary sewer



Location 11: 57 Ave (OLSAGM0287)

- Sewer cleaning and CCTV of approximately 69.33 meters of sanitary sewer
- Approximately 69.33 meters of CIPP relining 300mm sanitary sewer
- Re-establishing of approximately 0 sanitary services
- CCTV of approximately 69.33 meters of post lined sanitary sewer

